



FOCUS

WORLD CLASS INNOVATION


The new FOCUS freezer has an elegant, yet robust, design to optimally catch the attention of your customers. The lid design, the improved insulation and the heated frame ensure minimum ice build-up. Cyclopentane is used as blowing agent and the cabinets are CFC free.

FEATURES


- Environmentally friendly
- Low service costs
- Perfect view to the products
- Custom made design
- Long life
- Available in all climate classes
- Graphics (option)
- Minimum icebuild-up
- Designed for transport
- Eye Catching design
- LED internal light (option)
- 75 mm insulation
- Also available as combination of cooler and freezer- see page 55.
- Accessories including baskets - see page 64

THINK GREEN
SAVE UP TO 30% ENERGY

The FOCUS freezer is designed to match the requests and demands from the ice cream and frozen foods industries. Therefore, attention has been on developing a freezer which is environmentally friendly throughout its complete life cycle, keeping total life cycle costs as low as possible. Energy consumption reduced by up to 30% (Tested according to EN441). Also available as cooler.

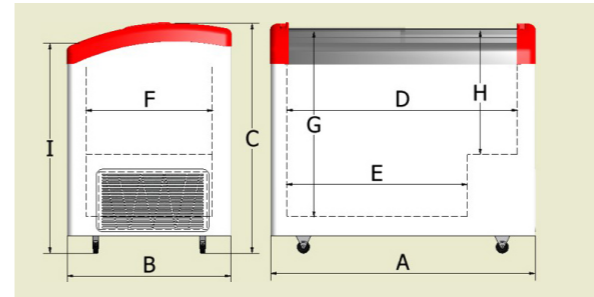

Dimensions according to technical data below

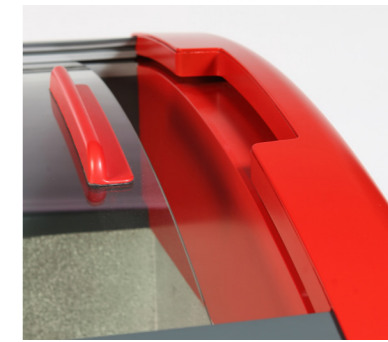

	FOCUS 73	FOCUS 106	FOCUS 131	FOCUS 151	FOCUS 171
Climate class 4	4	4	4	4	4
Ambient temperature range	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	4+	4+	4+	4+	4+
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	161	270	352	418	484
Net volume, litres	113	193	254	302	351
Temperature range inside unit	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
Temp range as cooler	+2 to +8	+2 to +8	+2 to +8	+2 to +8	+2 to +8
Standard refrigerant	R600a	R600a	R600a	R290	R290
Refrigerants available: R134a/R290/R404a/R600a	Yes	Yes	Yes	Yes	Yes
Energy consumption / 24 h kwh at 30 deg. C	2,2 (R600a)	2,5 (R600a)	2,8 (R600a)	3,7 (R290)	4,4 (R290)
Input power (watt)	141	155	211	230	230

DIMENSIONS					
External dimensions (WxDxH)	726x656x850	1056x656x850	1306x656x850	1506x656x850	1706x656x850
Internal dimensions (WxDxH)	570x500x670	900x500x670	1150x500x670	1350x500x670	1550x500x670
Dimension A	726	1056	1306	1506	1706
Dimension B	656	656	656	656	656
Dimension C	850	850	850	850	850
Dimension D	570	900	1150	1350	1550
Dimension E	370	700	950	1150	1350
Dimension F	500	500	500	500	500
Dimension G	670	670	670	670	670
Dimension H	420	420	420	420	420
Dimension I	770	770	770	770	770
Insulation (mm)	75	75	75	75	75

ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (model C75-01/C75-02)	2/3	4/4	5/6	6/7	7/8
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	Optional	Optional	Optional	Optional	Optional

OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Inner cabinet: option	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Graphics	Optional	Optional	Optional	Optional	Optional
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
UL approval / DOE approval	Yes	Yes	Yes	Yes	Yes
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	44	54	62	68	73
Gross weight, kg	47	58	66	73	79

SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	135	96	75	68	59
Standard Trailer capacity	153	108	90	75	66



FOCUS 73 GREY



FOCUS 106 BLUE



FOCUS 131 RED



PLEXI DIVIDER



FOCUS 151 RED



FOCUS 171 BLUE



S-DISPLAY