

MICRON II

Neon di serie
Neon standard



OPTIONAL:
Spot luminoso
Lighting top



MICRON I
(RAL)



MICRON III
(RAL)



Termostato meccanico esterno
Mechanical external thermostat

Termometro meccanico interno
Mechanical internal thermometer

Colori standard
Standard colors

Colori optional
Optional colors



COD. 17



COD. 33



COD. 28



RAL


		°C	mm. (LxPxH)	Li.	DI SERIE	Watt	% U.R.	DEFROST				Kg.	
Micron I		+4/+10	430x385x734	68	n° 2 mm. 320x350	261	75		230v/1/50Hz		R134a	34	- di serie
Micron II		+4/+10	430x385x885	93	n° 2 mm. 320x350	261	75		230v/1/50Hz		R134a	37	- di serie
Micron III		+4/+10	430x385x1105	120	n° 3 mm. 320x350	261	75		230v/1/50Hz		R134a	40	- di serie

Dati di collaudo • Test details • Détails d'essai • Prüfungsergebnisse • Datos de ensayo • MAX = (25°C - % U.R. 60)


Prezzi vedi LISTINO a pagina 8
See PRICE LIST on page 8




MICRON I

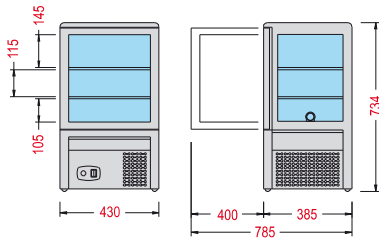



MICRON II

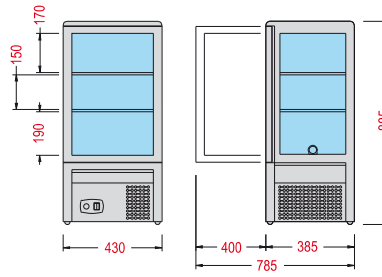


MICRON III

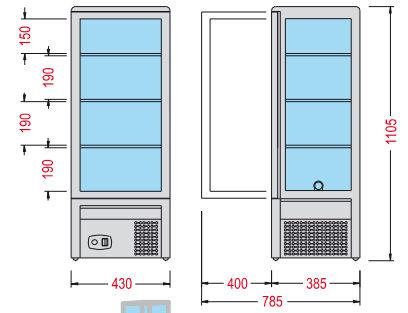


GOLOSO

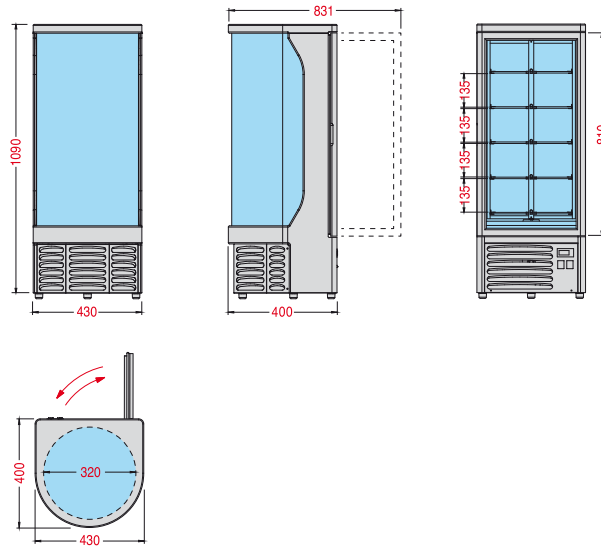



JUNIOR 120 G

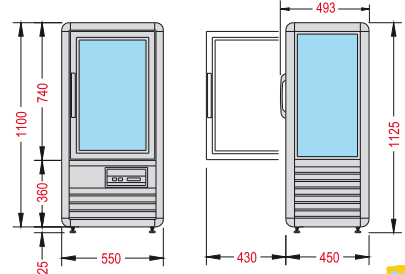

JUNIOR 120 GBT

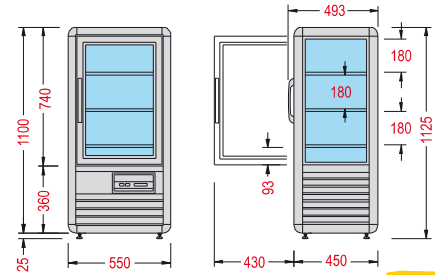

MIDI 190 R

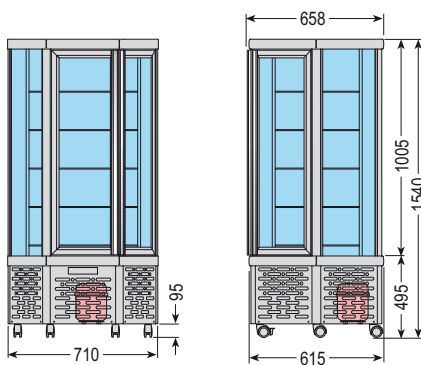

*
Larghezza porta
Door width
Largeur de la porte
Weite von der Tür
Anchura de la puerta

